

Flat Freddie 35 is a versatile profile suitable for a huge range of applications. Designed in conjunction with our Spec Series RGB+Twin White LED strip, Flat Freddie 35 offers a unique combination of a powerful white light with an independent RGB light - great for residential or hospitality applications.

MOUNTING OPTIONS			DIFFUSER OPTIONS			SUPER SERIES LED STRIP OPTIONS		
Surface mounted	Satin		Lumens per metre	Watts per metre	Colour temp.	Lumens per metre	Watts per metre	Colour temp.
Recessed	Black		310lm		2700K	1955lm		2700K
Rod suspended			330lm	3W	3000K	2060lm	20W	3000K
Wire suspended			345lm		4000K	2160lm		4000K
			760lm		2700K	2400lm		2700K
			800lm	7W	3000K	2530lm	26W	3000K
			840lm		4000K	2650lm		4000K
SPEC SERIES RGB+TWIN WHITE LED STRIP OPTIONS								
Lumens per metre	Watts per metre	Colour temp.	1520lm		2700K			
1990lm white	15W RGB, 25W White	3000K	1600lm	14W	3000K			
2100lm white		4000K	1680lm		4000K			


- LED strip options vary depending on region - please consult your local distributor for more information. Other LED strip options are available on request, including IP54 and IP67.
- All lumen values refer to the bare LED strip. Losses through diffuser/profile are not represented. Consult photometric data.
- 5 year manufacturer's warranty on Super Series & Spec Series LED strip.

ACCESSORIES

JN-ST-23 Straight joiner, top of extrusion	JN-ST-21 Pair of straight joiners, for sides of extrusion	JN-90-23 90 degree joiner, top of extrusion	JN-90-21 Pair of 90 degree joiners, for sides of extrusion	CB-60-R-S / CB-60-R-W / CB-60-R-B Cable base 60, recessed	CB-80-SM-S / CB-80-SM-W / CB-80-SM-B Cable base 80, surface mount	SWK22-1-1M / SWK22-1-2M / SWK22-1-4M Wire suspension - 1m, 2m, 4m
SRK-11-S / SRK-11-W / SRK-11-B Rod suspension kit (rod not incl.)	SRK-12-S / SRK-12-W / SRK-12-B Rod suspension kit (rod not incl.)	ROD-0.5M / ROD-1M / ROD-2M Suspension rod - 0.5m, 1m, 2m	DR-EN-1 (no suspension) DR-EN-1-SWK22-1M (with 1m wire suspension) DR-EN-1-SWK22-2M (with 2m wire suspension) DR-EN-1-SWK22-4M (with 4m wire suspension) Driver enclosure for 100W Triac dimmable driver (with or without integrated wire suspension)	DR-EN-2 (no suspension) DR-EN-2-SWK22-1M (with 1m wire suspension) DR-EN-2-SWK22-2M (with 2m wire suspension) DR-EN-2-SWK22-4M (with 4m wire suspension) Driver enclosure for Tridonic dimmable & non-dimmable driver (with or without 1m, 2m or 4m integrated wire suspension)	C-FF35-I Recessing cowling	C-35-EC-I Recessing cowling end cap
C-FF35-JN Recessing cowling joiner						

ADDITIONAL INFORMATION

Applications: Bars, restaurants, kitchens, living rooms, dining rooms, reception counters, lobbies.
Installation: Interior or exterior (with IP65/IP67 rated LED strip).
Materials: Extruded aluminium body, polycarbonate diffuser, aluminium end caps.
Finish: Natural silver anodised or custom powder coat colours.
Light source: LED ribbon strip.
Power supply: 24V DC - remote driver options ranging from 6W up to 320W.
Dimmable: Various options available, please enquire.

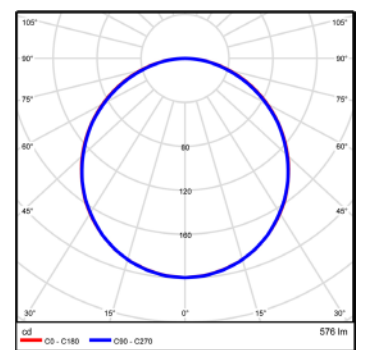

Polar curve for 2250 lumen LED strip with satin diffuser.